

# MM-160-TG



## DESCRIPTION

Stainless steel Clear-Thru extraction arm for wall or ceiling mounting. 2m/7ft or 3m/10 ft length, 160mm/6.25" diameter with 3 flexible external joints.

Complete with mounting bracket for wall/ceiling mounting.

The spun stainless steel hood can be angled in any direction and is fitted with a safety mesh screen.

All metal parts are made from 316L stainless steel. The flex hose at the joints is a clear food grade polyurethane material with internal stainless wire reinforcement.

This style extraction arm has four adjustable friction joints and Clear-Thru design with no internal parts.

The shoulder and elbow joints are made from PA6 plastic and are located on the outside of the arm.

The MM-160-TG arm is shipped assembled, field attachment of the wall bracket necessary.

Recommended for airflows of 450cfm/ 800m<sup>3</sup>/h through 850cfm/1450m<sup>3</sup>/h.


## TECHNICAL DATA

Product Number	All models	MM-160-2-TG	MM-160-3-TG
Length:		2m / 7ft	3m / 10ft
Tube / hose diameter:	160mm / 6,25"		
Duct / hose connection:	160mm / 6,25"		
Hood diameter:	300mm / 11,75"		
Materials:	316L Stainless steel PA6 plastic Polyurethane hose		
Weight:		15Kg / 33 lbs	18Kg / 40 lbs
Maximum Temperature:	80°C / 175°F		
Wall mounting bracket:	Standard		
Air volume	450cfm/ 800m <sup>3</sup> /h @ 2000fpm/10,5m/s through 850cfm/1450m <sup>3</sup> /h @ 4000fpm/20m/s.		

# HANDLING AND OPERATION

## Handling

1. Hand grip for the hood/arm.
2. Easy-to-reach external support mechanism.







## Hood operation

Stainless steel hood can be angled 65° to the side, 75° forwards and 120° backwards.



# MEASUREMENTS AND PRESSURE LOSS

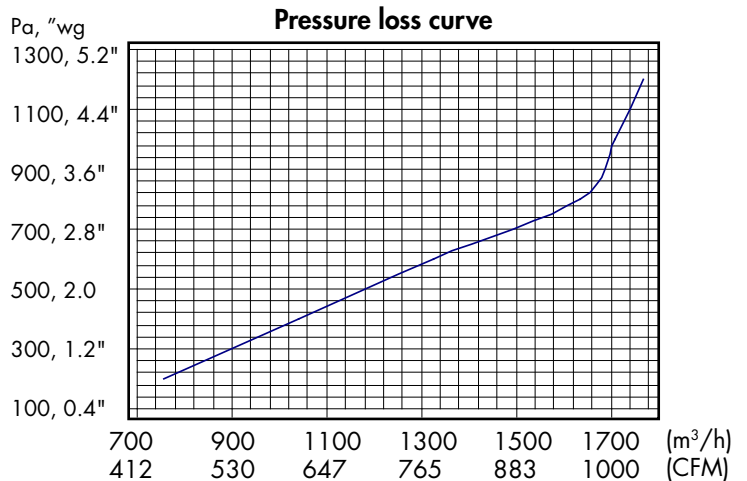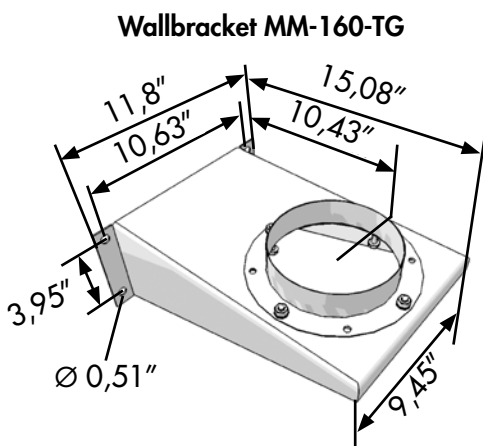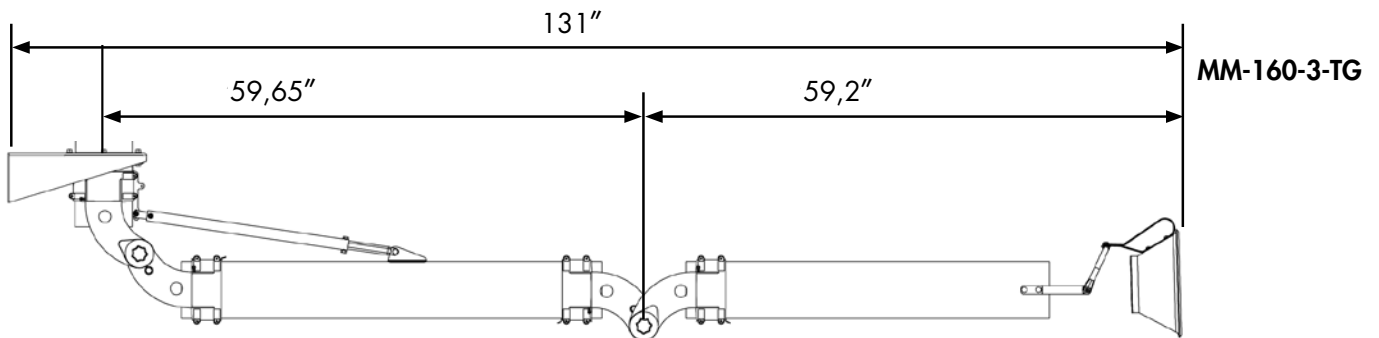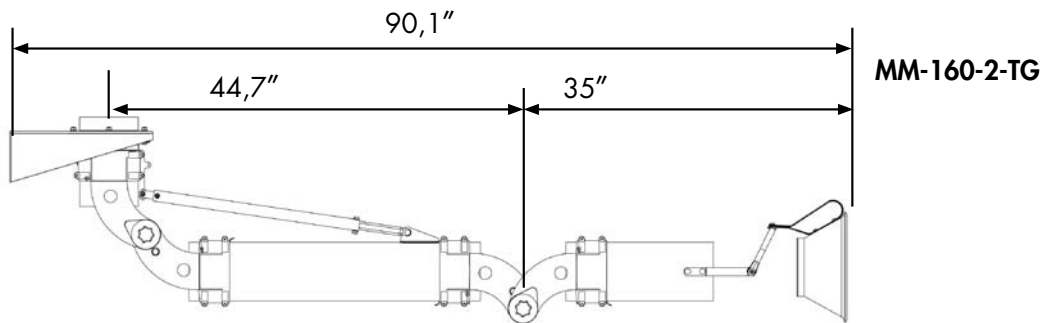

# PLYMOVENT®

PlymoVent Corp  
 375 Raritan Center Parkway  
 Edison, New Jersey 08837 - USA  
 Tel: (732) 417 08 08  
 Fax: (732) 417 18 18  
 www.plymovent.com  
 info@plymoventusa.com

PlymoVent Canada Inc  
 6615 Ordan Drive, Unit # 3  
 Mississauga, ON L5T 1X2  
 Tel: (905) 564-4748  
 Fax: (905) 564-4609  
 www.plymovent.com  
 info@plymovent.ca

PlymoVent representative